



K'Spinney
Series

Create the Room of Your Dreams!!

The look of wood but with all the characteristics of tiles. Tenderness of wood and sturdiness of stones, with various options of colors.

K' Spinney series will bring panache of authentic hard-wood to your floor and elevate your style quotient to a new dimension.


Wood tiles inside the bathroom or your more contemporary home. You'd be surprised how much interest and refreshed feelings can be added with this more organic look.



K' ASPEN



195 x 1200mm | GVT

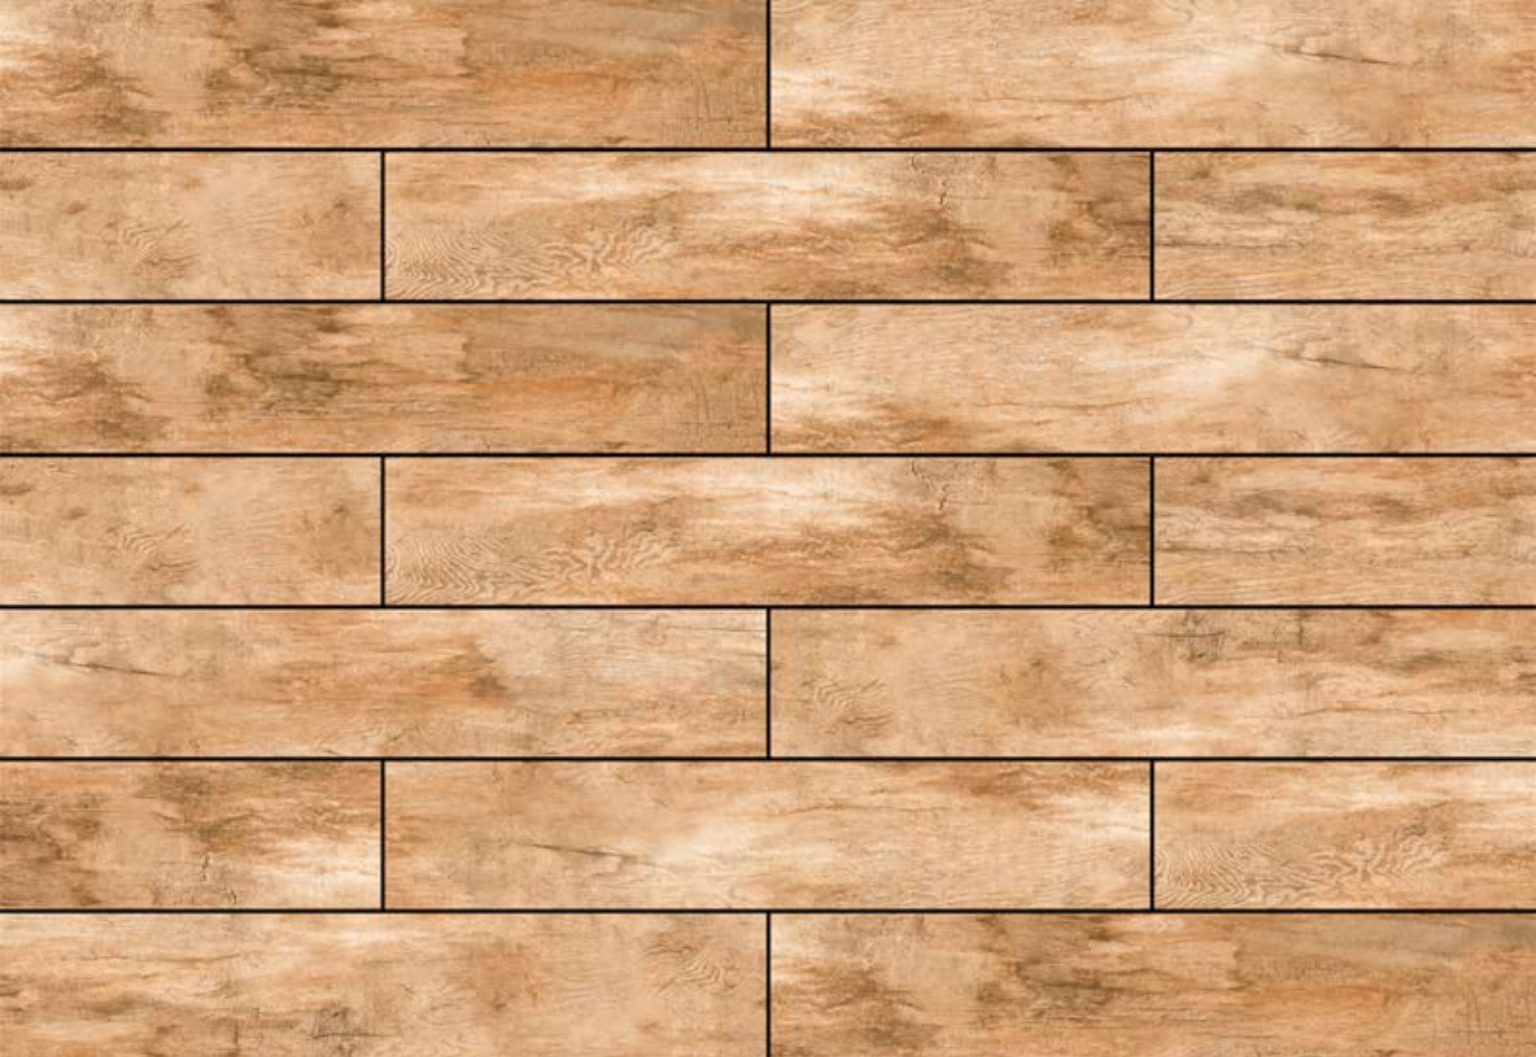

K' CRIMSON



195 x 1200mm | GVT



K' HEDGE



195 x 1200mm | GVT



K' LARCH



195 x 1200mm | GVT

Technical Specification

Characteristic	Standard as per ISO 11066:EN14411 Group IIIa	Mean Value of K-Mark Published GVT	Mean Value of K-Mark GVT	Test Method
REGULATORY PROPERTIES				
Deviation in Length & Width	+ 0.5%	+0.1%	+0.1%	ISO10545-2
Deviation in Thickness	+ 5.0%	+4.0%	+4.0%	ISO10545-2
Straightness in side	+0.5%	+0.1%	+0.1%	ISO10545-2
Rectangularity	+0.6%	+0.1%	+0.1%	ISO10545-2
Surface Flatness	+0.5%	+0.2%	+0.2%	ISO10545-2
Color Difference	Unaltered	No Change	No Change	ISO10945-16
Glossiness	As per Mfg	Min 90%	Min 4%	Glossometer
STRUCTURAL PROPERTIES				
Water Absorption	0.50%	0.20%	0.20%	ISO 10545-3
Apparent Density	2.0g/cc	2.10g/cc	2.10g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of Rupture	Min.35 N/mm ²	Min.40 N/mm ²	Min.40 N/mm ²	ISO-10545-4
Breaking Strength	Min.1300 N	Min.2000 N	Min.2000 N	ISO-10545-4
Impact Resistance	As per Mfg	Min.0.55	Min.0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface Abrasion Resistance	As per Mfg	Min.Class-3	Min.Class-4	ISO-10545-7
Mohr's Hardness	As per Mfg	Min.4	Min.5	EN 101
THERMO HYGROMETRIC PROPERTIES				
Frost Resistance	No Damage	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	Nil	ISO-10545-10
Thermal Expansion(COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Cracking Resistance	As per Mfg	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Stip Resistance	As per Mfg	> 0.40	> 0.40	ISO-10545-17
Fire Resistance	As per Mfg	Fireproof	Fireproof	N.A.
Lead & Cadmium Given off	As per Mfg	Does Not Yield	Does Not Yield	ISO-10545-15
By Glazed Tiles		Pb & Cd	Pb & Cd	
SAFETY PROPERTIES				
Chemical Resistance	No Damage	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistant	Resistant	Resistant	ISO-10545-14

Packing Details

Sl. No	Size	Thickness (MM)	Piece Per Box	Area/Box Sq. ft.	Wt./Box Kgs.
1	195 x 1200mm	12.0 (Approx)	4 pcs.	15.11	38.5(Approx)

K-Mark Bizsol Pvt. Ltd.

K-Mark Bizsol Pvt. Ltd., S-34, 7th floor, Alapatt Heritage Building M.G Road, Kochi - 682035
Reg. : Manav Plaza, Ravapar Road, Morbi-363 641, Gujarat, India.
www.k-markgroup.com | info@k-markgroup.com | Toll Free- 1800-103-4922

Follow Us:

